



Cabinet Lights

LicLLab



Cabinet lights



Our cabinet lights combine style, efficiency, and advanced technology. With a **CRI >90**, they deliver vivid, **natural colors** and uniform illumination, thanks to the use of Single BIN selected LEDs. Crafted from high-quality **anodized aluminum** and equipped with a polycarbonate diffuser, they emit a soft, **glare-free** light. Available in both recessed and surface-mounted versions, these fixtures are **durable, versatile**, and ideal for modern interiors. For added comfort, they can be integrated with smart **sensors**—proximity, PIR, or IR touch switches.

light is culture

LEA surface

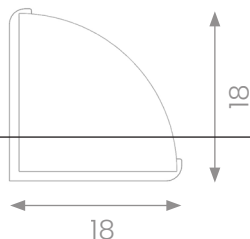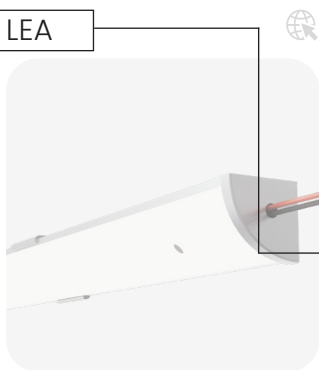

Wattage: 10 Watt/meter

Length

CTT

2	620mm 6W	27K	2700 K 685 lm	30K	3000 K 726 lm	40K	4000 K 760 lm
3	920mm 9W	27K	2700 K 1028 lm	30K	3000 K 1089 lm	40K	4000 K 1140 lm
4	1220mm 12W	27K	2700 K 1370 lm	30K	3000 K 1452 lm	40K	4000 K 1520 lm

Sensors

PS	Proximity hand sensor switch with LED blue	IR	Proximity hand sensor switch	THD	Proximity hand dimmer switch with LED blue
----	--	----	---------------------------------	-----	--

Final code without sensor example: LEA2.AN.27K

Final code with sensor example: LEA2.AN.27K.PS

Code system

Product Name Code

Grey Boxes

Inside grey boxes you can find the **combinable specifications** to obtain the product you need.

For the product in the left page you can choose length, CTT and sensors. The **code particles** are those written in **bold**.

Example

2 if you want the option of 620mm length

30K if you are interest in a daylight atmosphere.

Final Code

- Every code **start** with **Product Name Code**
- **Between** each code **particle** is needed a **dot (.)**
- Sometimes there are standard additional particles needed

Pay attention to final code **syntax**. The order of code particles is very important. Always **check the example**.



Cabinet lights - index

LEA 4



Surface

10 Watt/meter

Section: 18x18 mm

LEO 5



Recessed

10 Watt/meter

Section: 19x17 mm

LOE 8



Surface

10 Watt/meter

Section: 20x20 mm

LOEM 9



Surface or recessed

12 Watt/meter

Section: 8x9 mm

ZIN 10



Recessed



10 Watt/meter

Section: 20x12 mm

Sensors & Drivers 12



LEA surface

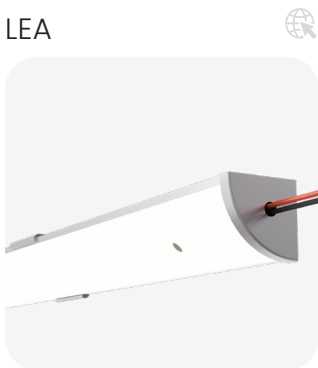

Wattage: 10 Watt/meter

Length		CTT					
2	620mm	27K	2700 K	30K	3000 K	40K	4000 K
	6W		685 lm		726 lm		760 lm
3	920mm	27K	2700 K	30K	3000 K	40K	4000 K
	9W		1028 lm		1089 lm		1140 lm
4	1220mm	27K	2700 K	30K	3000 K	40K	4000 K
	12W		1370 lm		1452 lm		1520 lm


Sensors

PS	Proximity hand sensor switch with LED blue		IR	Proximity hand sensor switch		THD	Proximity hand dimmer switch with LED blue	

Final code without sensor example: LEA2.AN.27K

Final code with sensor example: LEA2.AN.27K.PS

LEO2 recessed



Wattage: 10 Watt/meter

Length

CTT

2	620mm 6W	27K	2700 K 685 lm	30K	3000 K 726 lm	40K	4000 K 760 lm
3	920mm 9W	27K	2700 K 1028 lm	30K	3000 K 1089 lm	40K	4000 K 1140 lm
4	1220mm 12W	27K	2700 K 1370 lm	30K	3000 K 1452 lm	40K	4000 K 1520 lm

Sensors

PS	Proximity hand sensor switch with LED blue	IR	Proximity hand sensor switch	THD	Proximity hand dimmer switch with LED blue
----	--	----	---------------------------------	-----	--



Final code without sensor example: LEO2.AN.27K

Final code with sensor example: LEO2.AN.27K.PS





LOE surface

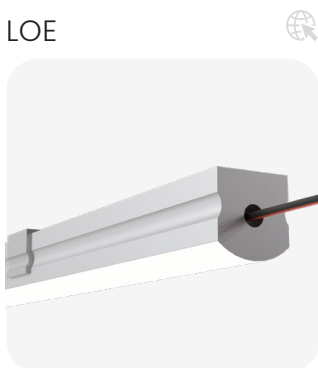

Wattage: 10 Watt/meter

Length

CTT

2	620mm 6W	27K	2700 K 685 lm	30K	3000 K 726 lm	40K	4000 K 760 lm
3	920mm 9W	27K	2700 K 1028 lm	30K	3000 K 1089 lm	40K	4000 K 1140 lm
4	1220mm 12W	27K	2700 K 1370 lm	30K	3000 K 1452 lm	40K	4000 K 1520 lm

Sensors

PS	Proximity hand sensor switch with LED blue	IR	Proximity hand sensor switch	THD	Proximity hand dimmer switch with LED blue
----	--	----	---------------------------------	-----	--


Final code without sensor example: LOE2.AN.27K

Final code with sensor example: LOE2.AN.27K.PS

LOEM

surface/recessed

LOEM



Wattage: 12 Watt/meter

Length

CTT

1	328mm 4W	27K	2700 K 242 lm	30K	3000 K 252 lm	40K	4000 K 265 lm
2	620mm 7.5W	27K	2700 K 508 lm	30K	3000 K 529 lm	40K	4000 K 556 lm
3	920mm 11.5W	27K	2700 K 766 lm	30K	3000 K 798 lm	40K	4000 K 838 lm
4	1220mm 12W	27K	2700 K 1016 lm	30K	3000 K 1111 lm	40K	4000 K 1111 lm


Final code without sensor example: LOEM.I.AN.27K



ZIN

recessed

ZIN




Wattage: 10 Watt/meter

Length		CTT					
2	620mm	27K	2700 K	30K	3000 K	40K	4000 K
	6W		685 lm		726 lm		760 lm
3	920mm	27K	2700 K	30K	3000 K	40K	4000 K
	9W		1028 lm		1089 lm		1140 lm
4	1220mm	27K	2700 K	30K	3000 K	40K	4000 K
	12W		1370 lm		1452 lm		1520 lm

Final code without sensor example: ZIN2.AN.27K

Sensors



Proximity sensor

On/Off function when hand pass over the sensor within 18 cm


L-SENS002



Door sensor

Light will turn on/off when the door is close or open

L-SENS003



Hand sensor

Automatically switch ON/OFF when sweeping hands, dimming and memory function.

L-SENS004



Touch sensor

Touch switch ON/OFF with dimming and memory function

L-SENS005

Drivers



On/Off

60/75/100 Watt

D021/D022/D023



Dali

60/75/100 Watt

D024/D025/D026



Credits

LICLLAB Design Team

LICLLAB SRL

Via Conegliano 96
31058 Susegana (TV)
Italy

+ 39 04381842163

info@licllab.it

LICLLAB MIDDLE EAST FZCO

IFZA Business Park, DDP
39547 - 001
Dubai

Scan the QR
code to visit
our website



or find us at
www.licllab.it

Our products have

5 Years
warranty

and are certified



LicLLab
light is culture

licllab.it