


ECO 8 Recessed with oval Pin Hole

The ECO8 is a professional architectural downlight, recessed ceiling-mounted, designed for indoor applications. It features an adjustable tilt of 25° and a full LED engine with 360° rotation. Constructed from durable aluminum, this compact fixture integrates advanced LED technology.

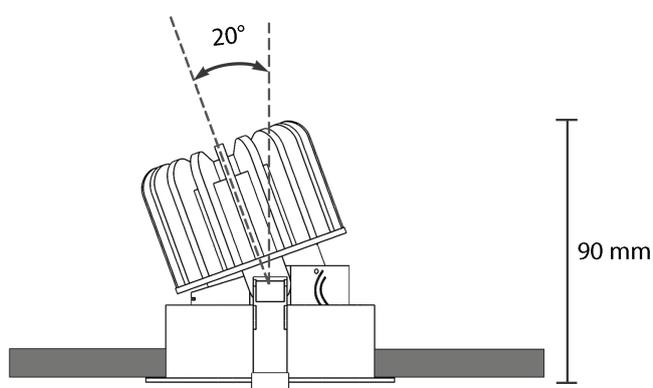

Product Final Code | Select a component for each column for final configuration

Product ID	+	Finishes	+	CCT	+	Optics	+	.EL
ECO8		WH White		27 2700K		SS 11°		
		BK Black		30 3000K		S 15°		
				40 4000K		M 24°		
						MF 36°		
						F 50°		

Configuration Example | ECO8.WH.27.S.EL

*This product is available also with IP65 adding .65 to the end of the configuration code

Technical Data

Application	Recessed
Finish	Powder painting
Dimensions	Ø 85 x H 85 mm
Cut - Hole	75 mm
Fitting Life	100.000h L80 B20 (Ta ,25°C) Reported TM-21 L70 Lifetime: > 100.000 hours

Specification Product

Light Distribution	11° - 15° - 24° - 36° - 50°
CRI	≥ 90
SDCM	2
Wattage	8 Watt
Voltage	36 Volt
Weight	280 g
Springs	Included

Lumen Data

CCT	Flux Lumen	Delivered Lumen
2700K	1207	1026
3000K	1270	1079
4000K	1314	1117

Accessories

H-008



Honeycomb

Drivers

D028



On/Off
Max 1

D031



Dali - 2
Max 1